

MEMS Portable Tilt Meter

The portable tilt meter system has a demountable sensor and is designed for applications where a large number of measuring points are to be observed. Portable MEMS Tilt Meters use a MEMS inclinometer to measure tilt in either one or two axial planes perpendicular to the surface of the base plate



MEMS Portable Tilt Meter

Overview



Portable MEMS Tilt Meters use a MEMS inclinometer to measure tilt in either one or two axial planes, perpendicular to the surface of the base plate. Depending on the model, the output is an analog DC signal or digital output and is directly proportional to the sine of angle of tilt.

In the horizontal position the DC output is zero. Portable MEMS Tilt Meters require the tilt meter to be placed in a reproducible position on a reference plate attached to the surface being monitored. The portable tilt meter system has a demountable sensor and is designed for applications where a large number of measuring points are to be observed.

Portable MEMS Tilt Meter systems consist of the tilt meter, interconnecting cable, stainless steel tilt plates, and the readout instrument. Tilt plates are bolted or bonded to the structure to accurately, and repeatedly, locate the sensor.

APPLICATIONS

- Monitor tilt of retaining and building walls
- Tilt of concrete dams
- Landslide monitoring
- Ground subsidence
- Building safety along adjacent excavations
- Applications where the failure mode is expected to have a rotational component
- Differential compression in earth dams and embankments
- Observation of benches and berms in open pit mines
- Bridge piers

FEATURES

- Uniaxial or biaxial sensors available
- Horizontal or vertical applications
- Readout units and portable sensor are lightweight and easy to use
- Data logger compatible
- High accuracy and repeatability
- Operational range and temperature coefficients exceed that of bubble sensor devices



MEMS Portable Tilt Meter

Specifications

ITEM	DESCRIPTION
Range	±15° (other ranges upon request)
Axis	Uniaxial & Biaxial
Accuracy ¹ (analog)	±0.005° (±18 arc sec ±0.1mm/m) ±0.017% FS
Accuracy ² (digital)	±0.004° (±13.5 arc sec ±0.07mm/m) ±0.0125% FS
Resolution (analog)	0.0019° (7 arc sec, 0.03 mm/m) 0.007% FS
Resolution (digital)	0.0005° (2 arc sec, 0.01 mm/m) 0.007% FS
Repeatability (analog)	±0.002° (±7.2 arc sec ±0.03 mm/m) ±0.007% FS
Repeatability (digital)	±0.002° (±7.2 arc sec ±0.03 mm/m) ±0.007% FS
Sensor	MEMS (Micro-Electro-Mechanical Systems) Inclinometer
Material	Stainless steel / Aluminium NEMA 4X (IP65) weather proof enclosure
Weight	4.710 kg

TILT PLATE SPECIFICATIONS

Material	316 stainless steel
Dimensions	140 OD x 63ID x 14 mm. 4 pegs equally spaced on 102 mm diameter
Weight	0.77 kg
Installation	Epoxy or mechanical, 4 x ¼" mounting holes on 102 mm diameter

OPTIONAL EQUIPMENT

Protective cover for tilt plates

Bonding compound for tilt plates and in-place sensors

CABLE TYPE

Type 800 - Multi-core with Braid

ORDERING INFORMATION

Range

Axis


Output

Mounting

Readout

¹ Readout dependent

² Using 3rd order polynomial

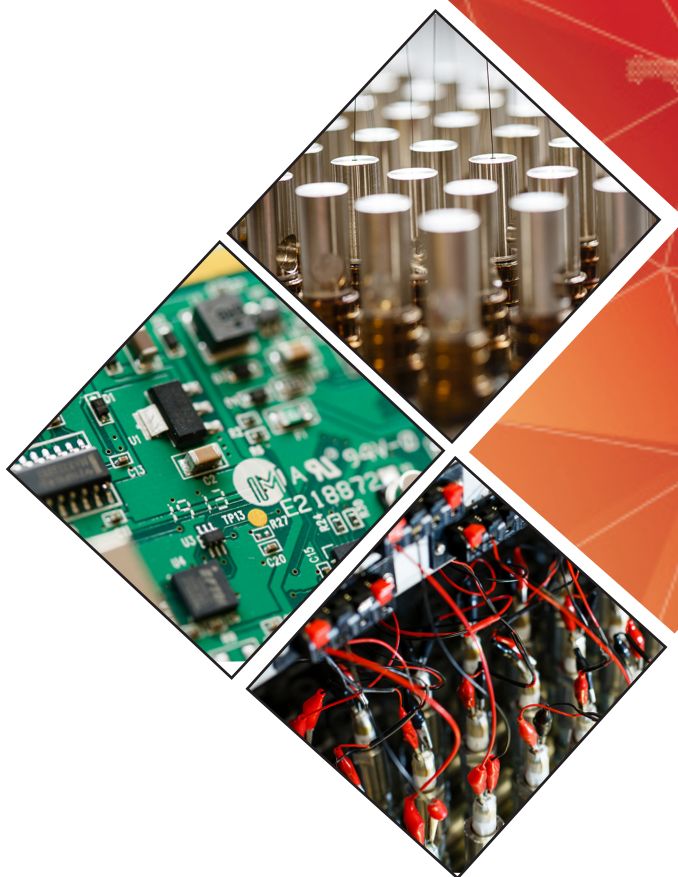

HEAD OFFICE

Nova House
Rougham Industrial Estate
Rougham, Bury St Edmunds
Suffolk IP30 9ND
England

+44 (0)1359 270457
sales@geosense.com
support@geosense.com

NORTH AMERICA OFFICE

15 West 38th Street
Suite 632
New York
NY 10018

+1 518-920-3483
sales@geosense.com
support@geosense.com

www.geosense.com

Specifications are subject to change without notice and should not be construed as a commitment by Geosense. Geosense assumes no responsibility for any errors that may appear in this document. In no event shall Geosense be liable for incidental or consequential damages arising from the use of this document or the systems described in this document. All Content published or distributed by Geosense is made available for the purposes of general information. You are not permitted to publish our content or make any commercial use of our content without our express written consent. This material or any portion of this material may not be reproduced, duplicated, copied, sold, resold, edited, or modified without our express written consent.

V1.8 10/2024